

Busch

EQUIPMENT COMPANY, LLC

AKRON[®]

Efficiently Moving Grain

GRAIN BAG UNLOADER

For 10-foot bags

EXG480X




WWW.BUSCHEQUIPMENT.COM

GREAT CAPACITY: up to 360 t/h!!!
Rolls up 10-foot bags up to 150 m long.



- **New rear driveshaft transmission with top and bottom right-angle gearboxes connected with each other by means of a cardan shaft.**
- **The augers' guards are free from obstacles for a better grain flow.**
- **Less maintenance needed.**
- . **Simple to adjust:** It is very easy to swing into transport or working position.
- . **Modern design:** allows an easier unloading operation and minimizes the risk of bag damage.
- . **Grain pusher:** It ensures a better end of bag.
- . **Hydrostatic movement:** The machine moves automatically as the bag is winded up by the roll. It has a speed adjustment system and a sturdy reduction gearbox.
- . **Extra-reinforced chassis.**
- . **Independent hydraulic controls**
- . **Adjustable knife:** to cut the bag at the ideal angle.
- . **Axles and tires:** Reinforced axle system to accommodate the extra weight when unloading in wet and soft ground conditions. High flotation tires (400 x 60 x 15.5").
- . **Electrostatic polyurethane paint**

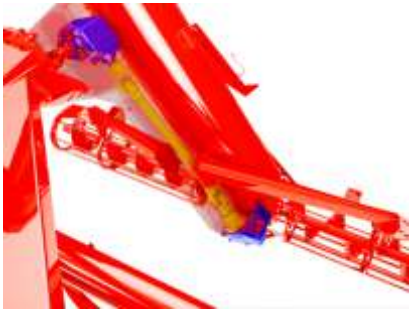

Hydraulic Movable Spout.



Led Running Lights.

TECHNICAL SPECIFICATIONS	
For bags of	9 and 10 feet.
Unloading Performance	Up to 380 tonnes/hour
Power Required	90 HP
Maximum hydraulic power	180 bar 60 LPM
Tube/ Auger Diameter	430 mm
Horizontal Auger Diameter	250 mm

EXG 480X
Busch
 EQUIPMENT COMPANY, LLC

2810 38 ST, Columbus, NE 68601
 (402) 563-1502 • (800) 243-2583
 sales@buschequipment.com
www.buschequipment.com

AKRON may change specifications and product designs in this or other brochure at any time, without previous notice. Pictures shown are for illustration purposes only.



Bottom angular gearbox.



Independent hydraulic controls speed control valve.



With the robust roller transmission it is possible to unload 500-ft bags.



Grain Pusher. It ensures a better end of bag.